


Technical data

Technical data		Driver & Condition	
Flow Rate	1000 L/h	Coupling type	Direct Coupling
Total head	7 bar	Driver	Electromotor 1.5 KW
Direction of Rotation	CW/CCW	Maximum suction lift	2 m
Speed of Rotation	63 rpm	Speed Reducer	Gearbox
Suction	DIN2543	Max.solid content	2 mm compressible 5 mm incompressible
Discharge	DIN2543	Inverter	N/A
Casing	ST37(Coated)	Operating Condition	
Hose	NR	Operation Temp.	Up to 80 °C
Rotor	ST37	ATEX	N/A
Connection	Stainless Steel 316		
Shaft	1.6511		

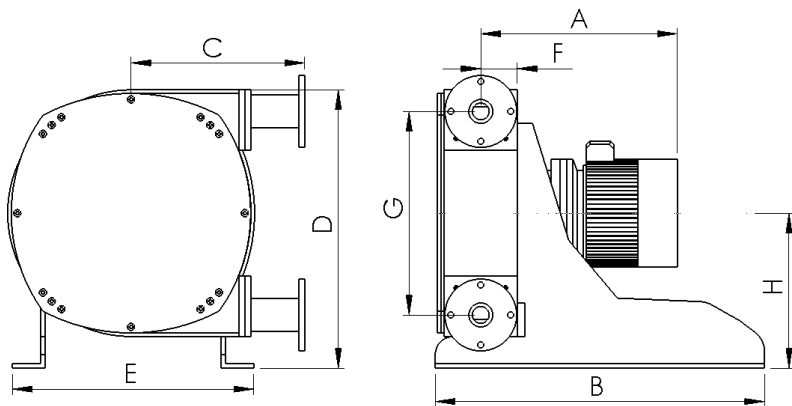

Connector Size	ANSI 150#	EN DIN	JIS
PA1010.MH	3/4"	20 mm	20 mm

Type	A	B	C	D	E	F	G	H
PA1010.MH (mm)	250	350	170	400	400	65	293	235